


Halbwölber
Side arches

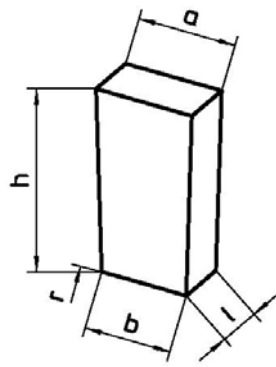

Querwölber
Keys

InsulationNet

INSULATIONET.COM

Bezeichnung <i>Designation</i>	Kurzzeichen <i>Mark</i>	Maße in mm <i>Dimensions in mm</i>					Rauminhalt <i>Volume</i> dm ³	
		a	b	h	l	r ¹⁾		
Halbwölber <i>Side arches</i>	1 H 6	67	61	114	230	1197	1,68	
	1 H 10	69	59	114	230	695	1,68	
	1 H 16	72	56	114	230	413	1,68	
	1 H 24	76	52	114	230	257	1,68	
	1 H 6-76	79	73	114	230	1425	1,99	
	1 H 10-76	81	71	114	230	832	1,99	
	1 H 16-76	84	68	114	230	499	1,99	
	1 H 24-76	88	64	114	230	314	1,99	
	2 H 6	67	61	124	250	1302	1,98	
	2 H 10	69	59	124	250	756	1,98	
	2 H 16	72	56	124	250	450	1,98	
	2 H 24	76	52	124	250	279	1,98	
	Querwölber <i>Keys</i>	1 Q 10	119	109	230	64	2553	1,68
		1 Q 14	121	107	230	64	1791	1,68
1 Q 28		128	100	230	64	838	1,68	
1 Q 50		139	89	230	64	419	1,68	
1 Q 10-76		119	109	230	76	2553	1,99	
1 Q 14-76		121	107	230	76	1791	1,99	
1 Q 28-76		128	100	230	76	838	1,99	
1 Q 50-76		139	89	230	76	419	1,99	
2 Q 10		129	119	250	64	3025	1,98	
2 Q 14		131	117	250	64	2125	1,98	
2 Q 28		138	110	250	64	1000	1,98	
2 Q 50		149	99	250	64	505	1,98	

1) Radius bei 2 mm Fuge / Radius with 2 mm joint